


ATS1811

Relay board, 8-way

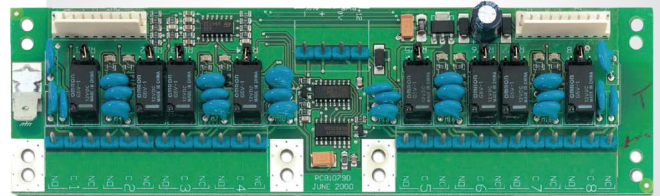

OVERVIEW

The eight way clocked relay card ATS1811 provides eight single pole double throw relays with connection terminals to the common (C), normally open (NO), and normally closed (NC) contacts.

The relay contacts are rated at 1 A @ 0 to 30 VDC or 300 mA @ 48 VDC. Relay cards can be connected together to provide up to sixteen relays when connected to an expander and up to sixty-four relays in a four to eight door/lift expander

An LED is provided for every relay to indicate activation.

FEATURES

- Extend panel or expander with eight SPDT relay outputs
- Max number depends on pane/expander
- Option to power with separate power supply
- Plug-in using flat-cable (included)

ATS1811

Relay board, 8-way

National Sales Enquiries
Level 4.01, 2 Ferntree Place
Notting Hill, Victoria 3168
Phone: 1300 361 479
Outside Australia: +61 401 777 572
www.aritech.com.au

SPECIFICATIONS

General

Expander type	Output expander
Product line	Axon
Connection type	Pre made connection lead
Max. distance from panel	Located in Panel or DGP/Expander housing
Max. per panel	Depending on panel/expander

Outputs

Total	8
Onboard	8
Type of outputs	Relays
Relays	SPDT

Electrical

Operating voltage	10.5 to 13.8 VDCI
Current consumption	50 mA (standby) 250 mA (all relays active)

Physical

Physical dimensions	176 x 52 mm
---------------------	-------------

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing

Regulatory

Compliance	CE, RCM
------------	---------