


ATS626

Plug-in output expander, 16-way

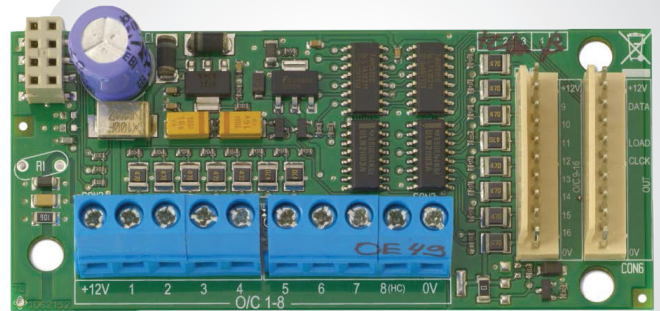

OVERVIEW

The ATS626 offers an eight way output expansion to Axon series panels. To reduce required space in the Main control panel housing, the unit is a plug-in to the Main Control panel PCB. The ATS626 provides for eight Open Collector outputs available through screw terminals, one being a high-current output.

In addition it provides for eight additional open collector outputs through dedicated connection leads to ATS1810 four way relay cards. The output function is defined through the output configuration in the main control panel.

FEATURES

- Expand Axon series panel with eight open collector outputs on the PCB
- Expand with additional eight relay outputs using 2 x ATS1810 four way relay card
- 1 high current output (1A)
- Open collector output max 50 mA
- Plug-in to Axon series panels

ATS624

Plug-in output expander, 16-way

National Sales Enquiries
Level 4.01, 2 Ferntree Place
Notting Hill, Victoria 3168
Phone: 1300 361 479
Outside Australia: +61 401 777 572
www.aritech.com.au

SPECIFICATIONS

General	
Expander type	Output expander
Product line	Axon
Connection type	Plug-in
Max. per panel	1
Outputs	
Total	16
Onboard	8
Expandable	8 (2x ATS1810)
Type of outputs	Open collector
Electrical	
Operating voltage	10.5 to 13.8 VDC
Current consumption	50 mA (Low current OC) 1 A (High current OC)
Physical	
Physical dimensions	90 x 40 mm
Environmental	
Operating temperature	0° to 50°C
Relative humidity	95% noncondensing
Regulatory	
Compliance	CE, RCM